


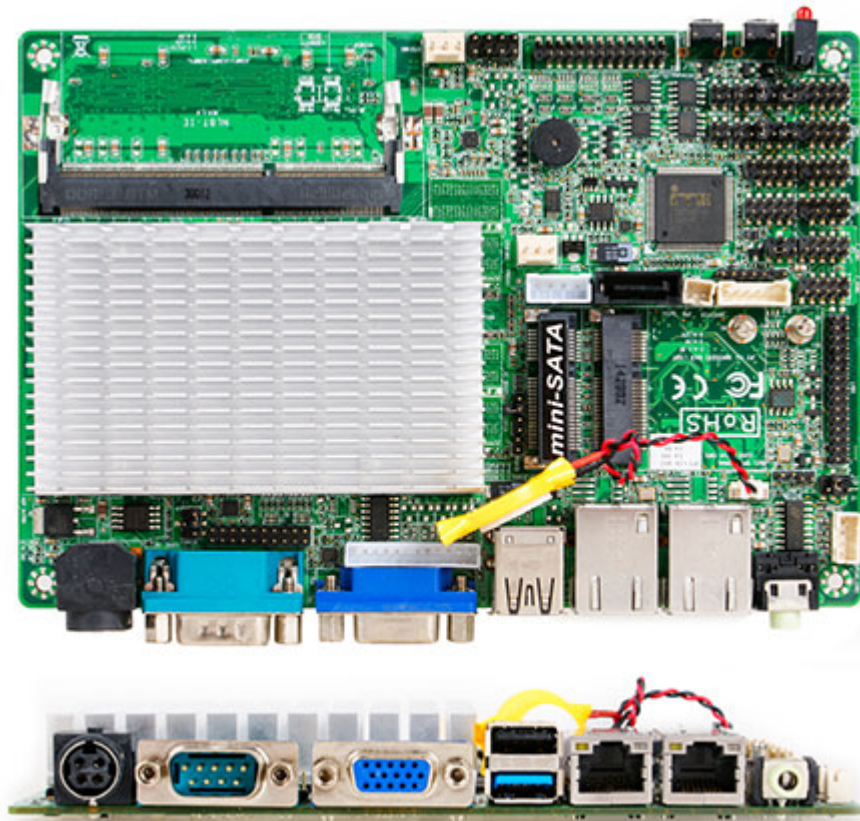

999.00 EUR

incl. 19% VAT, plus [shipping](#)

- [INTEL®](#) BayTrail-M N2930 SOC Chipset
- Onboard INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU
- Support DirectX 11 3D Graphics Acceleration
- Integrated HD Audio CODEC
- Support 2\* Gigabit LAN
- Support 1\*SATA2.0
- Support 6\*COM ports
- Support 5\*USB2.0 ports
- Support 1\*USB3.0 port
- Support SIM Card Socket
- Support 24-bit Dual channel
- Onboard 1\*MiniPCI-E connector(Half size)
- Onboard 1 \*M- SATA connector(Full size)
- Support G-sensor Function
- Support TP Connector
- All Tantalum Capacitor design
- Support power onboard(wide voltage input :9~24V)
- Form Factor(165mm X115mm)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>             | <ul style="list-style-type: none"> <li>• On board INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU</li> <li>• 2 Phase CPU Power Support</li> </ul>      |
| <b>Chipset</b>         | • INTEL® BayTrail-M I1900/N2930 SOC Chipset                                                                                                           |
| <b>I.O Chipset</b>     | • ITE IT8786E                                                                                                                                         |
| <b>Memory</b>          | <ul style="list-style-type: none"> <li>• 1* SO-DIMM slot</li> <li>• Support DDR3L 1333</li> <li>• Max. capacity of system memory up to 8GB</li> </ul> |
| <b>Expansion Slots</b> | • 1* Mini PCI-E connector(Half size)                                                                                                                  |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Storage</b>          | <ul style="list-style-type: none"> <li>1* Serial ATA2 3Gb/s connector</li> <li>1* <a href="#">M-SATA Connector</a>(Full size)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| • <b>Audio</b>            | <ul style="list-style-type: none"> <li>ALC887 Audio CODEC</li> <li>HD Audio CODEC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| • <b>Ethernet LAN</b>     | <ul style="list-style-type: none"> <li>2* GIGALAN</li> <li>Intel i211AT Chip</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| • <b>LVDS</b>             | <ul style="list-style-type: none"> <li>Onboard 24-bit Dual channel</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| • <b>USB</b>              | <ul style="list-style-type: none"> <li>5* USB 2.0/1.1(1 distribute in back panel, 4 distribute in mid-board)</li> <li>1* USB3.0 (distribute in back panel)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| • <b>Special Features</b> | <ul style="list-style-type: none"> <li>Support G-Sensor Function</li> <li>Support TP Connector</li> <li>Support CPU Smart Fan</li> <li>Support Watch dog Technology</li> <li>Support GPIO Technology</li> <li>Support Power Onboard (9~24v wide voltage input)</li> <li>Support VGA header</li> <li>Support 1*20-pin HDMI header</li> <li>Support SIM Card socket</li> <li>Support 2*RS422/RS485/RS232 for COM2&amp;COM3</li> <li>Support Amplifier function(3W)</li> <li>Support Power&amp; Reset Button</li> <li>All Tantalum Capacitor design</li> <li><a href="#">All Power Pack MOSFET design</a></li> </ul> |
| • <b>Back Panel I / O</b> | <ul style="list-style-type: none"> <li>1* DC-JACK(Co-lay 4-pin Power connector)</li> <li>1* USB2.0/1.1 port</li> <li>1* USB3.0 port</li> <li>2* RJ-45 ports</li> <li>1* COM port</li> <li>1* Line-out connector</li> <li>1* VGA port</li> </ul>                                                                                                                                                                                                                                                                                                                                                                   |
| • <b>Internal I / O</b>   | <ul style="list-style-type: none"> <li>2* USB 2.0/1.1 headers for 4 USB 2.0/1.1 ports</li> <li>1* CPU / Chassis Fan connector</li> <li>2* System Fan connectors</li> <li>5* COM headers (Support RS485/RS422/RS232 for COM2&amp;COM3)</li> <li>1* Parallel header</li> <li>1* 4-pin SATA Power connector</li> <li>1* 12-pin VGA header</li> <li>1* 20-pin HDMI header</li> <li>1* 24-bit Dual Channel LVDS header</li> <li>1* 4-pin Amplifier header</li> <li>1* GPIO header</li> <li>1* Mini PCI-e connector</li> <li>1* M-SATA connector</li> <li>1* SATA2.0 connector</li> <li>1* 4-pin PS/2 header</li> </ul> |
| • <b>BIOS</b>             | <ul style="list-style-type: none"> <li>AMI 64MB DIP Flash ROM</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| • <b>Form Factor</b>      | <ul style="list-style-type: none"> <li>EPIC Form Factor(165mm X 115mm)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |